


RPE X - HPE X 30÷55

9RtDtPpPDHHPHDD

5RP □ RPE X - HPE X 30÷55

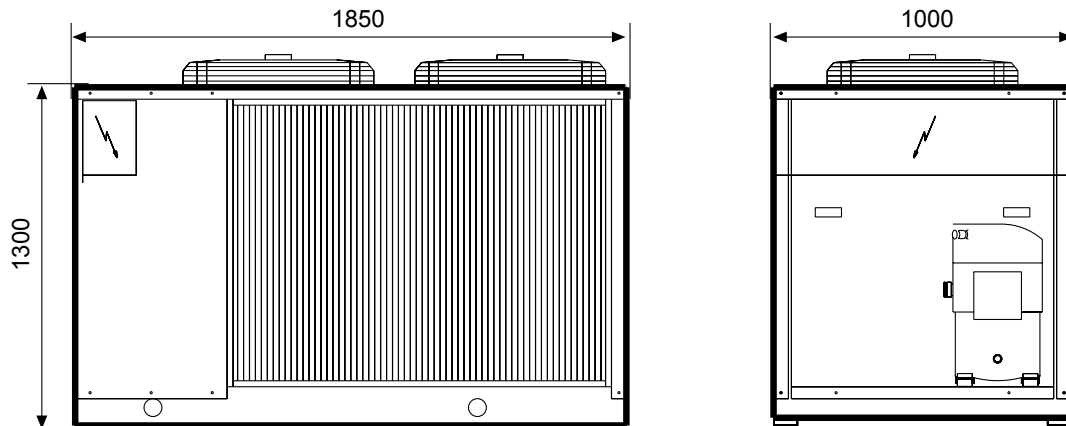

Technické data - RPE X - HPE X 30÷55

Values in mm

3R □	U.M.	RPE X- HPE X 30	RPE X- HPE X 37	RPE X- HPE X 42	RPE X- HPE X 55
DtR □	kW	24,2	27,9	32,7	41,3
HtRHDPHt □	kW	8,6	11,1	12,1	14,9
EER (1)	W/W	2,83	2,52	2,71	2,77
7RRPHR □	kW	30,1	36,1	41,2	55,3
HtRHPRHt □	kW	9,8	11,9	12,9	17,3
COP (2)	W/W	3,06	3,03	3,20	3,20
7RR □	kW	31,3	37,6	42,9	57,5
HtRHPRHt □	kW	7,8	9,5	10,3	13,8
COP (3)	W/W	4,01	3,96	4,16	4,17
3RHRPHR □	n.	1			
Pr tok vody	l/s	1,18	1,37	1,60	2,02
Tlaková ztráta vody (verze Standard)	kPa	39	51	37	39
Provozní tlak erpadla (verze Hydro)	kPa	221	181	250	181
Objem nádrže (verze Hydro)	l	300			
Expanzní nádoba (verze Hydro)	l	8,0			
P ípojka vodního okruhu		1"			
Ventilátory	n. x kW	1 x 0,52	2 x 0,52	2 x 0,52	2 x 0,52
Pr tok vzduchu	m ³ /h	7668	15840	15840	
Napájení		400V/3+N/50Hz			
Max current	A	24	28	31	46
Max peak current	A	114	123	124	179
Sound level (3)	dB(A)	51,5	52,5	52,5	52,5
Power pump	kW	0,55	0,55	0,55	0,75
Transport weight STANDARD version	kg	230	245	280	294
Weight STANDARD version	kg	233	248	283	297
Transport weight HYDRO version	kg	310	325	355	369
Weight HYDRO version	kg	613	628	658	672

(1) Refrigerated water from 12 to 7 °C, outdoor temperature 35 °C.

(2) Warm water from 40 to 45 °C, outdoor temperature 7 °C dry bulb/6 °C wet bulb

(3) Warm water from 30 to 35 °C, outdoor temperature 7 °C dry bulb/6 °C wet bulb

(4) Sound pressure level measured in free field at 1 m of distance from the unit (Q=2) according to ISO 3744